



5 F G 7 F 9 9 B ' 8 5 H 5 ' G < 9 9 H



COMPONENTS

- ▶ AIRSCREEN nano
 - ▶ Inflatable frame
 - ▶ Front or rear projection screen
 - ▶ Screen ties
 - ▶ Adjustable nylon tethers
 - ▶ Handheld blower
 - ▶ 2 year warranty
- ▶ Including all necessary equipment and manual


Ideal for everyone who wants to set-up a small cinema easily & quickly!

- + Compact and lightweight
- + Super easy set-up
- + Yet impressive screen size

Wrinkle free 16:9 screen surface with black backside - no disturbing backlight!

Airtight framework - no permanent inflation needed!

Compact and lightweight when deflated - yet surprisingly big when inflated!

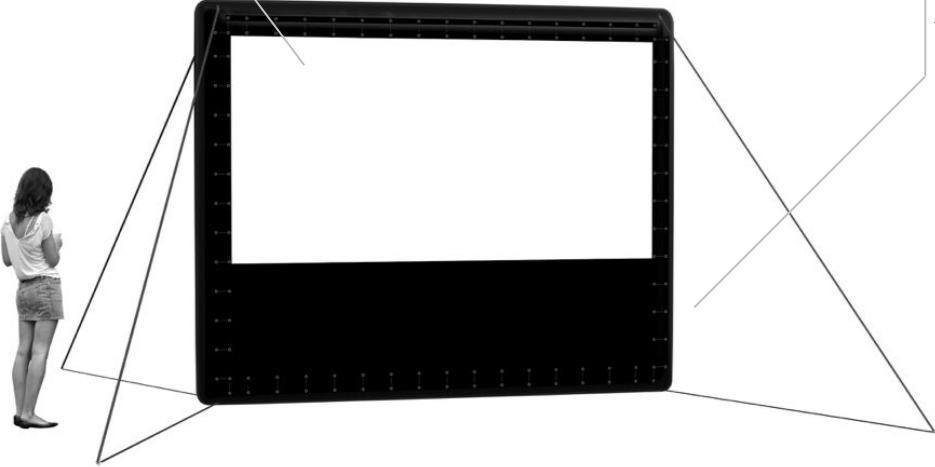

69DFC8I 7H€BG!' '# ' 'Gfj] g'F cUXž@UbY'7cj Y'K YghzGnxbYm5i gfu]U' Ž*%&- ('% ' &++ 'p]bZ 4 VYdfcXi Wjcbg"Vta 'pk k k "UjfgWYYb"Vta "Ui



H<9'5≠H÷ <H'A C89@G



The **airtight** models are available from 16ft (4.88m) to 24ft (7.32m) screen width and are built in a way that they do not require a blower during screen operation. The big advantage of this construction is the zero noise emitting operation of the screen e.g. for small audiences or indoor purposes. If some day a hole develops, a patented controlled blower box (optional) keeps your screen perfectly inflated when needed and switches off automatically once the pressure is right again.

COMPONENTS

- ▶ AIRSCREEN airtight
- ▶ Inflatable frame
- ▶ Front or rear projection screen
- ▶ Screen ties
- ▶ Adjustable nylon tethers
- ▶ Handheld blower
- ▶ 2 year warranty
- ▶ Including all necessary equipment and manual

Ideal for medium sized audiences in sensitive environments!
+ No noise at all
+ Ideal for indoor use
+ Swims on water

Wrinkle free 16:9 screen surface with black backside - no disturbing backlight!

Ultra-solid frame due to hf-welding - craftsmanship made in Germany!

Airtight framework - no permanent inflation needed!



69'DFC8I 7HCBG!' '# ' 'G]f]i g'F cUXz@UbY'7cj Y'K Ygrz'GmXbYm5i gfu]U'
Ž*%&- ('% ' '+ + 'p]bZc4 VYdfcXi W]cbg"Vta 'pk k k "U]fgWYYb"Vta "Ui



H< 9'7 @5GG=7 'A C89@G



The **classic** model range covers sizes from 20ft (6.10m) all the way up to 52ft (16m) screen width. Permanent high pressure inflation and precise engineering result in a product which never let you down. Moreover it is designed to give you a number of options to adopt to different circumstances e.g. blower attachment points on both sides of the frame.

COMPONENTS

- ▶ AIRSCREEN classic
 - ▶ Inflatable frame
 - ▶ Front or rear projection screen
 - ▶ Screen ties
 - ▶ Adjustable nylon tethers
 - ▶ Permanently running blower
 - ▶ 2 year warranty
- ▶ Including all necessary equipment and manual

- For constant users who seek for the most reliable screening solution for different kind of uses!**
- + Extremely durable
 - + Rapid inflation and deflation
 - + Remains upright even with minor punctures

Wrinkle free 2:1 screen surface with black backside - no disturbing backlight!

Ultra-solid frame due to hf-welding and reinforced details - this frame will never let you down!

Permanent inflation by high pressure blower - rapid inflation and flawless performance!




69'DF C8I 7HCBG!' '# ' 'G]f]i g'F cUXz@UbY'7cj Y'K Ygrz'GmXbYm5i gffU]U'
Z*%&- ('% ' '&++'p]bZc4 VYdfcXi W]cbg"Vta 'pk k k "U]fgWYYb"Vta "Ui


' cZ+




G=N9`CJ 9F J 9K



For up to 50 viewers




For up to 100 viewers

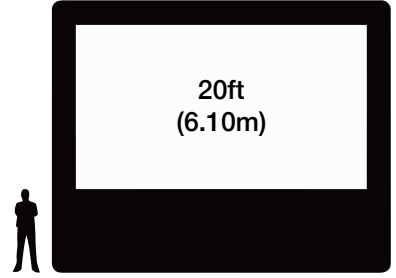

For up to 200 viewers




For up to 400 viewers or 30 cars

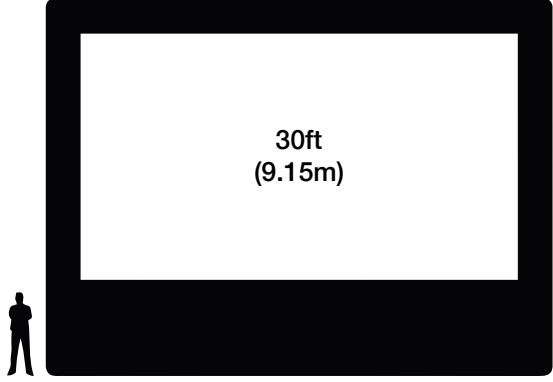

For up to 800 viewers or 50 cars



For up to 1,500 viewers or 150 cars

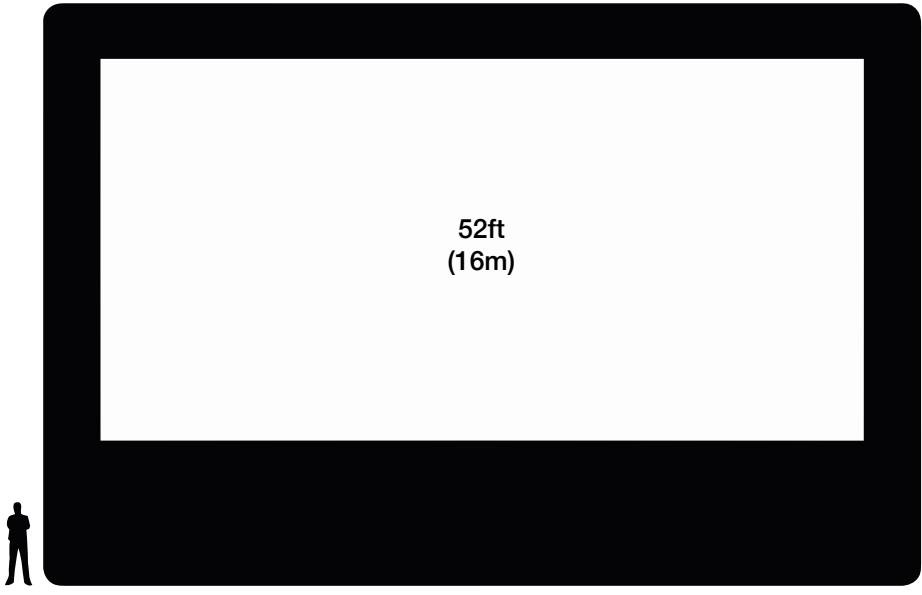

For up to 3,000 viewers or 250 cars

* Height of person illustrated: 5.7ft (1.75m)

69`DFC8I 7H€BG!'`%#`'G]f]i g`F cUXž@UbY`7cj Y`K YgržGmXbYm5i gfrU]U`
Ž*%&- ('%`'&++`p]bZc4 VYdfcXi W]cbg"Vta`pk k k "U]fgWYYb"Vta`"Ui

(`cZ+



H97 < B 7 5 @ GD97 ÷ 7 5 H € B G . ' a ' ' ' _ [' ' ' _ a #



Model		nano	airtight	airtight	airtight	classic	classic	classic	classic	classic	
Screen surface	Size (m)	3.00 x 1.70	4.88 x 2.74	6.10 x 3.43	7.32 x 4.12	6.10 x 3.43	7.32 x 4.12	9.15 x 5.15	12.00 x 6.00	16.00 x 8.00	
	Rear projection size (m)	2.50 x 1.45	4.28 x 2.44	5.10 x 2.93	6.12 x 3.52	5.10 x 2.93	6.12 x 3.52	7.75 x 4.44	10.00 x 5.00	13.65 x 6.83	
	Material	PVC matt-white with black back side (front projection)									
	Gain factor	Front projection surface: 0.96, rear projection surface: 1.48									
Frame	Height off the ground (m)	1.00	1.75				2.00		2.20	3.00	
	Rear projection possible	Yes									
	Weight (kg)	5	8	12	18	12	18	28	42	76	
	Size (m)	3.5 x 2.9	5.5 x 4.8	7.1 x 5.7	8.5 x 6.5	7.1 x 5.7	8.5 x 6.5	10.6 x 7.9	14.0 x 9.2	18.4 x 12.2	
Accessories	Middle column	No									
	Eyelet row	Front (20 cm spacing)							Front and rear (20 cm spacing)		
	Weight (kg)	20	42	72	98	58	78	117	207	334	
	Belt length (m)	10	10	10	15	10	15	15	20	25	
Others	Belt width (mm)	25	25	25	25	25	25	35	50	50	
	No. of screen ties	70	100	125	145	125	145	180	290	380	
	Blower	Handheld (110V AC or 220V AC)				Permanently running blower (110V AC or 220V AC)					
	Additional blower	Not possible				Optional					
Others	Fire rating	DIN 2102 B1									
	Wind rating (km/h)	38									
	Footprint (m)*	6 x 6	9 x 10	12 x 11	14 x 13	12 x 11	14 x 13	17 x 16	22 x 18	28 x 24	
Shipping dimensions (cm)	1 pallet (120 x 80 x 70)				1 pallet (120 x 80 x 125)			2 pallets (120 x 100 x 120) (120 x 80 x 125)			

* Space required for operation (width x depth)

69'DF C 8 I 7 H € B G ! ' ' # ' ' G] f j g F c U X z @ b Y ' 7 c j Y ' K Y g r z G n X b Y m 5 i g r f U] U ' Z * % & - (' % ' ' & + + ' p] b z c 4 V Y d f c X i W f c b g V t a ' p k k k " U j f g W Y Y b " V t a " U i



H97 < B 7 5 @ GD97 ÷ 7 5 H € B G . Zh " V " a d \



Model		nano	airtight	airtight	airtight	classic	classic	classic	classic	classic	
Screen surface	Size (ft)	10 x 5.5	16 x 9	20 x 11.25	24 x 13.5	20 x 11.25	24 x 13.5	30 x 17	40 x 20	52 x 26	
	Material	PVC matt-white with black back side (front projection)									
	Gain factor	Front projection surface: 0.96, rear projection surface: 1.48									
	Height off the ground (lb)	3.28	5.75				6.56		7.22	9.84	
	Rear projection possible	Yes									
	Weight (lb)	11	18	27	40	27	40	62	93	168	
Frame	Size (ft)	11.5 x 9.5	18.0 x 15.7	23.3 x 18.7	27.9 x 21.3	23.3 x 18.7	27.9 x 21.3	34.8 x 25.9	45.9 x 30.2	60.4 x 40.0	
	Middle column	No									
	Eyelet row	Front (7.89 in spacing)							Front and rear (7.89 in spacing)		
	Weight (lb)	44	93	159	216	128	172	258	456	736	
Accessories	Belt length (m)	33	33	33	49	33	49	49	66	82	
	Belt width (mm)	1	1	1	1	1	1	1.4	1.4	2	
	No. of screen ties	70	100	125	145	125	145	180	290	380	
	Blower	Handheld (110V AC or 220V AC)				Permanently running blower (110V AC or 220V AC)					
	Additional blower	Not possible				Optional					
Others	Fire rating	DIN 2102 B1									
	Wind rating (mph)	24									
	Footprint (ft)*	20 x 20	30 x 33	39 x 36	46 x 43	39 x 36	46 x 43	56 x 53	72 x 59	92 x 79	
	Shipping dimensions (in)	1 pallet (47 x 31 x 28)				1 pallet (47 x 31 x 49)			2 pallets (47 x 39 x 49) (47 x 31 x 49)		

* Space required for operation (width x depth)

69 DFC 8I 7H € B G ! ' % # ' ' G J f j g F c U X z @ U b Y ' 7 c j Y ' K Y g r z G n X b Y m 5 i g f U] U ' Z * % & - (' % ' ' & + + p] b Z 4 V Y d f c X i W f c b g " V t a ' p k k k " U j f g W Y Y b " V t a " U i

* c Z +



5 F G7 F 99B ! ' H < 9 ' I @ H A 5 H 9 ' B : @ 5 H 5 6 @ 9 ' A C J 9 ' G 7 F 9 9 B



Worldwide shipping -
customers in over 120 countries



Global network -
a service partner near to you



Proven quality -
two years warranty & security certificates



24h service hotline -
we are there when you need us



Worldwide services -
our technicians go everywhere



Extensive stock -
rapid delivery of products & spare parts